



INSTALLATION INSTRUCTION

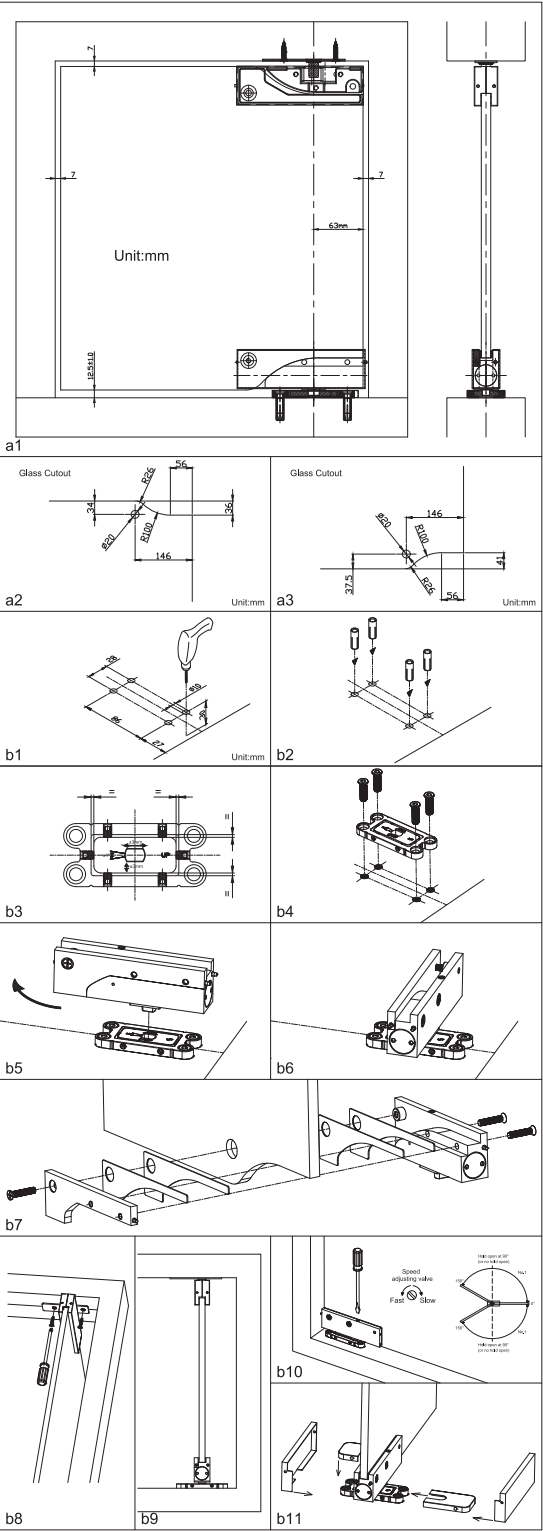

DATA AND FEATURES

Variable closing force	Spring strength(EN)	#3
Standard doors	≤ 850mm ≤ 60kg	PDC60
Suitable door thickness(mm)		8-13
Body dimensions(mm)	Length	163.6
	Height	50.1
	Projection	35.6
Angle of opening		150°
Power adjustable by spring		X
Sweep speed adjustable		✓
Hold-open	Without hold open	○
	Hold open at 90°	✓
Non-handed		✓
Guarantee/years		5 years

✓ =yes x=no ○=option

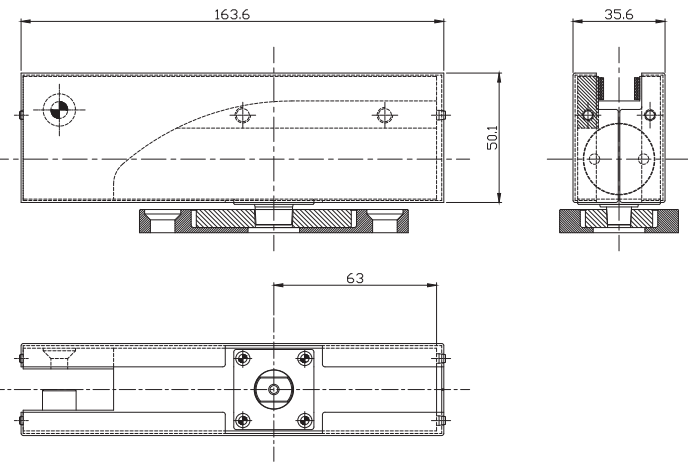


DATA AND FEATURES


Variable closing force	Spring strength(EN)	#3	#3
Standard doors	≤ 850mm ≤ 60kg	PDC63-S	PDC63
Suitable door thickness(mm)		≥ 30	≥ 30
Body dimensions(mm)	Length	140	140
	Width	30	30
	Thick	25	25
Angle of opening		180°	150°
Power adjustable by spring		X	X
Sweep speed adjustable		✓	✓
Hold-open	Without hold open	-	✓
	Hold open at 90°	✓	-
Non-Handed		✓	✓
Guarantee/years		5 years	5 years

✓ =yes x=no ○=option

When door is opened beyond 90°, it can stop at any angle.

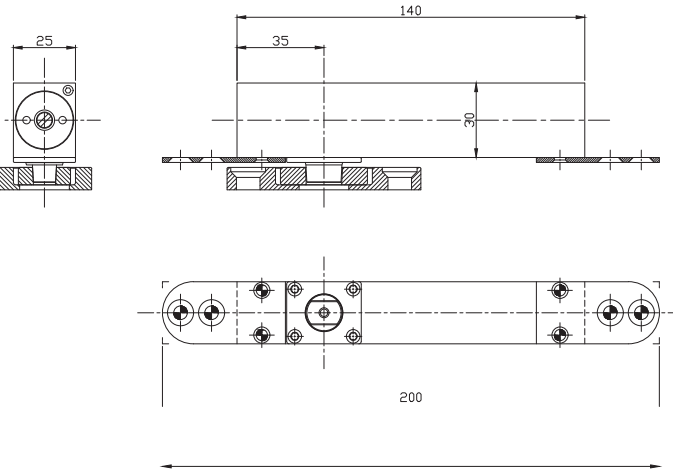

• Bottom Installation

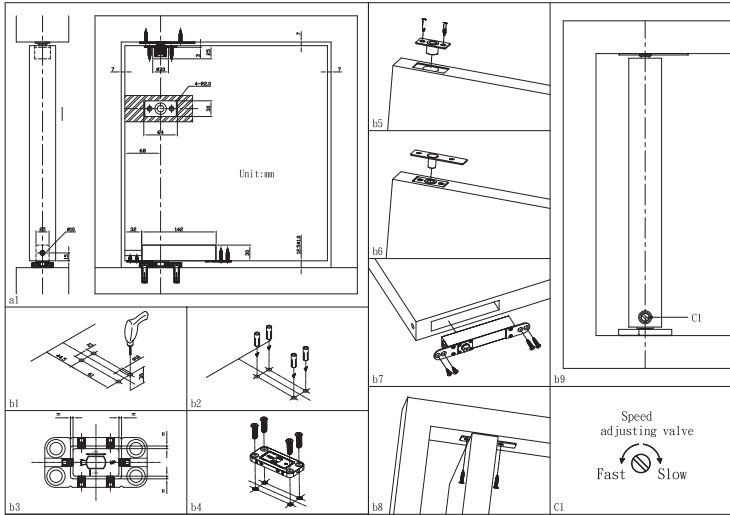

• Side Installation

